



03/30/00

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
U S A
(703) 205-8000

FAX: (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: http://www.bskb.com

CALIFORNIA OFFICE:
COSTA MESA, CALIFORNIA

TERRELL C BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
GARY D. YACURA
OF COUNSEL:
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET)*

*ADMITTED TO A BAR OTHER THAN VA.

THOMAS S. AUCHTERLOFF
MICHAEL R. CAMMARATA
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUEL, Ph.D.
DARIN E. BARTHOLOMEW
D. RICHARD ANDERSON
PAUL C. LEWIS
W. KARL RENNER
MARK W. MILSTEAD*
JOHN CAMPA*
REG. PATENT AGENTS
FREDERICK R. HANDREN
ANDREW J. TELESZ, JR.
MARYANNE ARMSTRONG, Ph.D.
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, Ph.D.
LAURA C. LUTZ
ROBERT E. GOOZNER, Ph.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES
JUSTIN D. KARJALA
C. KEITH MONTGOMERY

PTO
09/537707
03/30/00

Date: March 30, 2000

Docket No.: 2632-0134P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

As authorized by the inventor(s), transmitted herewith for filing
is a patent application applied for on behalf of the inventor(s)
according to the provisions of 37 CFR 1.41(c).

Inventor(s): SHIM, Shang K.

For: A DE-HUMIDIFICATION SYSTEM OF UNDERGROUND STORAGE
FACILITIES AND A METHOD FOR DE-HUMIDIFICATION THEREBY

Enclosed are:

- X A specification consisting of 15 pages
- X 14 sheet(s) of Formal drawings
- Certified copy of Priority Document(s)
- X Executed Declaration in accordance with 37 CFR 1.64 will follow
- A verified statement to establish small entity status under 37
CFR 1.9 and 37 CFR 1.27
- Preliminary Amendment
- X Information Sheet
- Information Disclosure Statement, PTO-1449 with reference(s)

Other _____

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	*****	*****	*****		*****
	*****	*****	***** \$690.00	or	***** \$345.00
	*****	*****	*****		*****
TOTAL CLAIMS	13 - 20 =	0	x18 =\$ 0.00	or	x 9 = \$ 0.00
INDEPENDENT	2 - 3 =	0	x78 =\$ 0.00	or	x 39 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$ 0.00
TOTAL \$ 0.00				TOTAL \$ 345.00	

X The application transmitted herewith is filed in accordance with 37 CFR 1.41(c). The undersigned has been authorized by the inventor(s) to file the present application. The original duly executed patent application together with the surcharge will be forwarded in due course.

_____ A check in the amount of \$_____ to cover the filing fee and recording fee (if applicable) is enclosed.

X The Government Filing Fee will be paid at the time of completion of the filing requirement.

_____ Please charge Deposit Account No. 02-2448 in the amount of \$_____. A triplicate copy of this transmittal form is enclosed.

X Send Correspondence to: BIRCH, STEWART, KOLASCH & BIRCH, LLP
P. O. Box 747
Falls Church, Virginia 22040-0747

X No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

~~TERRY L. CLARK~~

Reg. No. 32,644

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000
TLC/cqc

1. **Introduction**
 2. **Background**
 3. **Methodology**
 4. **Results**
 5. **Discussion**
 6. **Conclusion**
 7. **References**
 8. **Appendix**
 9. **Notes**
 10. **References**
 11. **Appendix**
 12. **Notes**
 13. **References**
 14. **Appendix**
 15. **Notes**
 16. **References**
 17. **Appendix**
 18. **Notes**
 19. **References**
 20. **Appendix**
 21. **Notes**
 22. **References**
 23. **Appendix**
 24. **Notes**
 25. **References**
 26. **Appendix**
 27. **Notes**
 28. **References**
 29. **Appendix**
 30. **Notes**
 31. **References**
 32. **Appendix**
 33. **Notes**
 34. **References**
 35. **Appendix**
 36. **Notes**
 37. **References**
 38. **Appendix**
 39. **Notes**
 40. **References**
 41. **Appendix**
 42. **Notes**
 43. **References**
 44. **Appendix**
 45. **Notes**
 46. **References**
 47. **Appendix**
 48. **Notes**
 49. **References**
 50. **Appendix**
 51. **Notes**
 52. **References**
 53. **Appendix**
 54. **Notes**
 55. **References**
 56. **Appendix**
 57. **Notes**
 58. **References**
 59. **Appendix**
 60. **Notes**
 61. **References**
 62. **Appendix**
 63. **Notes**
 64. **References**
 65. **Appendix**
 66. **Notes**
 67. **References**
 68. **Appendix**
 69. **Notes**
 70. **References**
 71. **Appendix**
 72. **Notes**
 73. **References**
 74. **Appendix**
 75. **Notes**
 76. **References**
 77. **Appendix**
 78. **Notes**
 79. **References**
 80. **Appendix**
 81. **Notes**
 82. **References**
 83. **Appendix**
 84. **Notes**
 85. **References**
 86. **Appendix**
 87. **Notes**
 88. **References**
 89. **Appendix**
 90. **Notes**
 91. **References**
 92. **Appendix**
 93. **Notes**
 94. **References**
 95. **Appendix**
 96. **Notes**
 97. **References**
 98. **Appendix**
 99. **Notes**
 100. **References**

**A DE-HUMIDIFICATION SYSTEM
OF UNDERGROUND STORAGE FACILITIES
AND A METHOD FOR DE-HUMIDIFICATION THEREBY**

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates to a system and a method for eliminating the dampness in the incoming atmosphere(air) which flows from outside into the underground or semi-underground storage facilities in which all kinds of food, pharmacies, goods, etc. are in custody under the condition of the constant temperature and humidity for a long term period. Especially, the present invention relates to a system and a method for eliminating the dampness or moisture in the incoming atmosphere with high temperature and humidity which flows from outside into the underground storage facilities by condensing the moisture into water-drops.

2. Description of the Background Art

The typical underground facilities are constructed into or under the earth in order to use them as storage spaces for goods or as living spaces for people. In order to use the underground facilities efficiently, it is very important to maintain the atmosphere circumstance of the underground facilities appropriately to its usage. Contrary to the on-ground, the underground has the constant temperature circumstance of about 10~15 centigrade degree. Generally, the storage facilities demanded the constant temperature circumstance to be constructed underground. Therefore, at least one of the wall 1a, the ceiling 1b and, the bottom 1c of the underground facilities is under the earth(ground) 99, as shown in the Fig. 1. The temperature of the ground or underground exerts an important effect on the temperature of the inside space of the underground facilities. If the underground facilities are isolated from the outside circumstance, then the temperature and the humidity does not change. However, the outside atmosphere generally flows into the underground

facilities according to loading and unloading of the stored goods. If the outside atmosphere is low in temperature and humidity, then the incoming atmosphere does not influence the inside atmosphere of the underground facilities. If the outside atmosphere is high in humidity, then the inside atmosphere of the underground facilities could have humidity problems. For example, if the outside atmosphere is in higher temperature and humidity than those of the inside atmosphere of the underground facilities, the humidity inside the underground facilities increases in case the air flows inside from the outside. The incoming atmosphere of high temperature and humidity which flows from the above-ground into the underground facilities is in contact with the inside wall of the underground facilities and the stored goods therein. The temperature of the atmosphere which came from the outside falls as it contacts the underground circumstances while having the outside humidity of high ratio. Generally, the temperature of the underground facilities is lower than the dew point of the incoming atmosphere. Therefore, the dampness of the incoming atmosphere condenses at the surface of the inside wall of the underground facilities and the stored goods therein. As a result, it is easy for the moisture of the incoming atmosphere to condense at the surface of the stored goods and surface of the wall, the ceiling and the bottom of the underground facilities. Then, the underground facilities cannot be used as the storage facilities. Especially, dew grows at the surface of the wall and the ceiling of the underground facilities as the temperature of the wall is lower than that of the inside atmosphere of the underground facilities.

In order to overcome the above mentioned problem, a heat shielding material 2 is applied on the inside surface of the underground facilities, that is, the wall 1a, the ceiling 1b and, the bottom 1c, as shown in Fig. 2. To do this, the lower temperature of the wall 1a contacting the earth 99 should be isolated from the inside atmosphere 11 of the underground facilities. Generally, the heat isolation material has two types, one is the panel type and the other is the spray type. When the panel type is applied, the atmosphere of the underground facilities can still contact the wall through the gap of the panels and the dew drops occur. The dewdrops may cause many unexpected problems. When the spray type is applied, no such dew occurs on the surface of the heat isolation material.

However, the humidity problem inside the underground facilities is not eliminated basically. Therefore, in order to maintain the profit humidity condition for storing goods, de-humidification facilities are needed.

The typical conventional underground facilities applying the panel type heat isolation material is mentioned below in detail. As shown in Fig. 3, an heat insulation layer 2 is formed by tiling the panel type heat insulation materials on the inside surface of the wall 1a of underground facilities. Generally, it is hard to plaster or paint on the surface of the heat insulation layer 2. Therefore, an inside wall 3 is constructed inside the underground facilities apart from the surface of the heat insulation layer 2 with certain a distance. As a result, a buffing space 4 is formed between the inside surface of the wall 1 of the underground facilities and the inside wall 3. In this case, the condensation occurs easily in the buffering space 4, especially, between the surface of the wall 1a and heat insulating layer 2. In order to treat the dewdrops resulting from the condensation, an water-draining trench 5 is formed facilities at the bottom of the buffing space 4 by constructing an water-proof groove 6 defining boundary between the buffering space 4 and the room of the underground. Furthermore, a ventilation window 11 is formed on the inside wall 3 in order to reduce the degree of humidity at the buffering space 4. However, the root cause of the high humidity or the over humidity in the underground facilities is not solved. Therefore, an additional facilities for dehumidification are needed. Generally, a dehumidifier and an air-conditioner are used for eliminating the moisture in the outside atmosphere which flows into the room of the underground facilities. However, installing these dehumidification facilities and maintaining these above mentioned facilities are very expensive.

SUMMARY OF THE INVENTION

One object of the present invention is to provide an underground facilities having a dehumidification system and a method for dehumidificating the room atmosphere in the underground facilities. Another object is to provide a dehumidification system using an active condensation inducing device in the underground

facilities and a method for dehumidification thereby. Yet another object is to provide an underground facility maintaining its room humidity to be in a lowered state and a method for maintaining the room humidity to be in a lowered state which is low enough to prevent the condensation problem from occurring on the goods in the storage facilities.

In order to achieve these objects, the present invention suggests an underground facility having a dehumidification system comprising an inside wall departing from a wall of the underground facility towards the inside area with a distance, a buffering space formed between the wall and the inside wall so that the inside wall divides the buffering space and a room of the underground facility and a ventilation means by which air is circulated between the room and the buffering space. Also, the present invention suggests a method for dehumidification in the underground facility comprising steps of dividing the inside space of the underground facility into two parts by constructing an inside wall near the wall so that one space formed between the inside wall and the wall is buffering space and the other space is a room space of the underground facility, flowing the air of the room space into the buffer space having the lower temperature than the room space so that the moisture in the inflow air is eliminated by condensation and exhausting the being dry air in the buffer space back into the room space of the underground facility.

BRIEF DESCRIPTION OF THE ATTACHED DRAWINGS

Fig. 1 is a cross-sectional view illustrating the conventional underground storage facility.

Fig. 2 is a cross-section view illustrating the conventional underground storage facility with the heat insulating material on the inside surface of the wall.

Fig. 3 is a cross-sectional view illustrating the conventional underground storage facility with the panel type heat insulating material on the inside surface of the wall.

Fig. 4a is a cross-sectional view showing the structure of the

underground facility with buffering space according to the present invention.

Fig. 4b is a perspective view showing the structure of the underground facility according to the present invention.

Fig. 5a is a cross-sectional view showing the structure of the underground facility according to the present invention.

Fig. 5b is a perspective view with a condensation inductor in the buffering space according to the present invention.

Fig. 6 is a perspective view showing another example of the present invention.

Figs. 7a and 7b are perspective views showing examples of condensation inductors formed with a concrete wall.

Figs. 7c and 7d are perspective views showing examples of condensation inductor formed with a waved steel sheet on the plain concrete wall.

Figs. 8a to 8c are showing examples of which the inside bottom is formed with full grating.

Figs. 9a to 9c are showing the inside bottom formed with partial grating.

Fig. 10 is a cross sectional view showing an underground facility having one example of a heat-up area according to the present invention.

Fig. 11 is a cross sectional view showing an underground facility having another example of a heat-up area according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, we explain about the present invention in detail referring to some preferred embodiments with drawings.

Preferred embodiment 1

The Figs. 4a and 4b show typical type of the underground facility according to the present invention. An underground facility is constructed under or semi-under the earth(or ground) 199. An inside wall 120 is constructed apart from the wall 110a of the underground facility towards the inside of the room with a certain distance. Therefore, a buffering space 130 is formed between the wall 110a and the inside wall 120 in which the temperature is lower than that of the room of the underground facility. In the buffering space 130, the temperature is directly effected by the earth 199 or the wall 110a which contacts the earth 199. Therefore, the temperature of the buffering space 130 is generally lower than the room temperature of the underground facility. As a result, when the room atmosphere of the underground facility has high humidity and if it flows into the buffering space 130, the moisture of the flown atmosphere is condensed into dewdrops 170.

A lower hole or window for ventilation 161 and an upper windows or holes for ventilation 162 are formed at the lower position and upper position of the inside wall 120, respectively. The atmosphere of the underground facility is flown into the buffering space 130 and it is exhausted from the buffering space 130 through these ventilation windows 161 and 162. If needed, a power fan 163 can be installed at one of the ventilation windows 161 and 162 in order for the inner atmosphere in the room of the underground facility to circulate compulsorily through the buffering space 130.

If the outside atmosphere from the aboveground has higher temperature and humidity than that of the underground room, it compulsorily flows into the buffering space 130 through the lower ventilation window 161 by the power fan 163. As the moisture is heavier than dry air, it is better if the high humidity air inflows through the lower ventilation window 161. In the buffering space 130, the moisture of the inflow air is mostly condensed to be dewdrops 170 on the surface of the wall 110a. Then, the inflow air is converted into dry and cool air and exhausted back to the room of the underground facility through the upper ventilation window 162. It is better if a ventilation duct 164 is installed to bridge the facing upper ventilation windows 162 forming the two faced inside walls 120.

In order to enhance the condensation effect at the buffering space 130, it is preferable if the temperature difference between the room of the underground facility and the buffer space 130 is big. Therefore, the inside wall 120 has a heat insulating material. If the dewdrop 170 is absorbed into the inside wall 120, the heat insulating performance is lowered. Therefore, it is better if the inside wall 120 does not absorb moisture. Especially, the surface of the inside wall 120 towards the buffering space 130 should have the waterproof capacity.

A water drainage trench 150 is constructed at the bottom of the buffering space 130 in order to drain the water from the condensation to outside. For effective drainage, the water drainage trench 150 has a slop way or a ramp.

Preferred embodiment 2

In the present invention, it is important to make the condensation compulsorily in order to eliminate the moisture effectively in the room atmosphere of the underground facility. Especially, the condensation should occur only in the buffering space. Therefore, it is better if a condensation inductor is installed in the buffering space.

The Figs. 5a and 5b show one example of this embodiment including a condensation inductor 140 using a steel chain hanging on the wall 110a. The condensation inductor 140 can have the similar temperature with the earth 199 or the wall 120 through radiation. So that, the moisture in the inflow air can be condense more easily into dewdrops at the surface of the condensation inductor 140.

To induce the condensation more effectively, it is better if the material of the condensation inductor 140 has high thermal conduction so that the cooling radiation occurs rapidly from the earth. Generally, metals having the high density, i.e., the heavier mass per unit volume, are preferred to be the typical material for the condensation inductor 140. Furthermore, it should not be rusted by the moisture or the dewdrops. For example, a stainless steel or a copper which does not rust anymore once its surface is rusted is good for the condensation inductor material.

Furthermore, the condensation inductor 140 should contact the earth 199 or the wall 110a which has the lowest temperature among the underground circumstance. Here, the wall means the outer case of the underground facility contacting the earth, that is at least one of the underground wall, the ceiling and the bottom is included in the term, "wall". Therefore, the cold temperature is continuously transferred to the condensation inductor 140.

Here, the one concerned is the shape of the condensation inductor. It is preferred that the surface of the condensation inductor contacts more amount of the air which inflows into the buffering space 130 as possible. Simultaneously, the air flow through the buffering space 130 can be easily performed. Therefore, the shape of the condensation inductor 140 is either a chain, pipe, grid or honey comb structure. The Fig. 6 shows another example of this embodiment including a condensation inductor 140 using a honey comb structure on the wall and using another type of ventilation window 161 and 162 and ventilation fan 163.

Preferred Embodiment 3

In this embodiment, we explain variations of the condensation inductor in detail. The Figs. 7a and 7b show the first and second example of the condensation inductor formed with a concrete wall 110a having the ridge and furrow surface 140a. The Figs. 7c and 7d shows the third and fourth example of the condensation inductor 140 formed with a plain concrete wall 110a and a waved metal sheet attached on the concrete wall.

According to the preferred embodiment 1, the wall 110a of the underground facility is constructed as the inside surface of the wall has a ridge and furrow shape. The concrete is a good material for the condensation inductor 140. So that, the area of the surface is maximized hence, the inflow air contacts the condensation inductor 140. The Fig. 7a shows the pattern of the ridge and furrow arrayed in a horizontal direction and the Fig. 7b shows the pattern of the ridge and furrow arrayed in a vertical direction.

Generally, in order to construct the surface of the concrete wall having the ridge and furrow shape, a molding panel having the

ridge and furrow shape is installed at the position where the wall is constructed at first. Then the concrete wall is constructed. And the molding panel is removed. At this point, if the molding panel is a better material for condensation inductor 140, then there is no need to remove the molding panel. Therefore, the molding panel can increase the effect of the condensation in maximum.

According to the preferred embodiment 1, the wall 110a of the underground facility is constructed with plain surface. And a waved metal sheet is fixed on the surface of the inside surface of the wall 110a. The Figs. 7c and 7d show the various patterns of the waved metal sheet used as a condensation inductor 140.

Preferred Embodiment 4

In this embodiment, the core technique is applied at the bottom of the underground facility. The bottom of the underground facility is fully buried in the earth 199, so the bottom 110C is the coldest surface of the underground facility. Furthermore, the air which is high in humidity or which has over humidity generally sinks down as the wet air is heavier than the dry air. Therefore, the bottom part is a good place for inducing the condensation compulsorily. The Figs. 8a to 9c show various examples of this embodiment according to the present invention.

An underground facility is constructed semi-under the earth(or ground) 199. The bottom of the underground facility has a slop for draining the water from the condensation to at least one side of the underground facility. A inside bottom is installed on the bottom with a certain distance. So, a buffering space is formed between the bottom and the inside bottom. Generally, in the inside bottom, the goods are stored and working men and carriers move around. So the room air easily flows into the buffering space and exhausted therefrom. So, it is preferred that the inside bottom has a grating part. The Figs. 8a and 9c show some examples of this embodiment in which the various slops are applied. The Figs. 8a to 8c show examples of which the inside bottom is formed with full grating, and the Figs. 9a to 9c show the inside bottom formed with partial grating. The Figs. 7a and 8a have two slops, that is, the center part of the

bottom is higher than the two side part. The Fig. 8b, 8c, 9b and 9c are formed with one slop, that is, the one side of the bottom is higher than the others. If needed, a condensation inductor can be installed between the bottom 110a and the inside bottom 120a.

5 Preferred Embodiment 5

According to the present invention, when the air with high temperature and high humidity flows into the underground facility from outside, the air is flown into the buffering space by this dehumidification system. In the buffering space, the moisture in the air which is flown from the underground facility is eliminated and this air returns to the room of the underground facility. The buffering space has similar temperature to the earth(underground) temperature as it contacts the underground directly and therefore, the temperature is lower than that of the room of the underground facility. In other words, the air inside the buffering space has lower temperature than the air of the underground facility while the moisture in the air is eliminated. In this circumstance, the dew point drops when the air contacts the surface of the stored goods and as a result a slight problem of dew occurs on the surface of the stored goods. In order to prevent this from happening, the temperature of the air circulated from the buffering space to the room of the underground facility needs to be heightened slightly so that it would be similar to the temperature of the room. However, the heightened temperature should not exceed the temperature of the room.

The Fig. 10 shows one example of this preferred embodiment. Considering that the condensation problem in the underground facility generally occurs in summer, the heat area 181 can get its heat source from the sun not from the artificial energy. Below is the example applied in case the upper part of the underground storage facility is constructed near the earth or in case it is constructed as a semi-underground facility. The heat area 181 exposed above the earth is formed between the outer portion of the buffering space 130 and the room 183 of the underground facility. The air in which the moisture eliminated in the buffering space 130 flows through the heat area 181 and after heightening the temperature slightly, it is returned to the room of the underground facility.

The Fig. 11 shows another example of this preferred embodiment. This example is applied in case the upper part of the underground storage facility is constructed deep down the earth. In this case, an heat collector 185 is installed above the ground. An heat transferring means 187 such as an heat pipe installed between the heat collector 185 and the heat area 181. An heat radiator 189 is connected to the end of the heat transferring means 187 and is installed inside the heat area 181. Therefore, the high humidity air is dried through the buffering space 130. Then temperature of the dried air is heightened to the temperature of the room 183 of the underground facility under the condition that it does not exceed the temperature of the room and the air of the heat area 181 flows back into the room.

THE ADVANTAGES OF THE PRESENT INVENTION

The present invention suggests an underground facility for storing goods having a dehumidification system and a method for eliminating the moisture in the air infiltrated from outside in which the air is higher in temperature and humidity than the underground facility. According to the present invention, the dehumidification system is constructed using the buffering space formed at the near space of the wall. The humidification of the present invention is performed by inducing the condensation in the buffering space. Therefore, there is no need to install any air conditioner nor dehumidifier which costs a lot to buy on the first hand, consumes electrical power constantly and which needs maintenance cost during the usage.

What is claimed is:

1. An underground facility having a dehumidification system comprising:

an inside wall departing from a wall of the underground facility
5 towards an inside area with a distance;

a buffering space formed between the wall and the inside wall,
so that the inside wall divides the buffering space and a room of the
underground facility and;

a ventilation means by which air can be circulated between the
10 room and the buffering space.

2. The underground facility according to the claim 1, wherein
the inside wall comprises a heat insulating material.

3. The underground facility according to the claim 1, wherein
15 the surface of the inside wall facing to the buffering space
comprises a waterproof material.

4. The underground facility according to the claim 1, wherein
20 the ventilation means comprising:

a lower ventilation window at the lower position of the inside
wall;

an upper ventilation window at the upper position of the inside
wall and;

25 a ventilation fan exhausting the inflow air from the room into
the buffering space through the lower ventilation window and back to
the room through the upper ventilation window.

5. The underground facility according to the claim 4 further
30 comprising a heat area wherein the exhausted air from the buffering

space is heated up similar to the temperature of the room before flowing into the room of the underground facility.

6. The underground facility according to the claim 1 further comprising a condensation inductor installed in the buffering space.

5

7. The underground facility according to the claim 6, wherein the condensation inductor comprises at least one from steel, stainless steel, aluminum and copper.

10

8. The underground facility according to the claim 6, wherein the condensation inductor has a shape as maximum surface area as possible and as not hindering the flow of the air circulation as possible such as waved sheet, chain, honey comb type panel.

15
20

9. The underground facility according to the claim 6, wherein the condensation inductor include a concrete surface having a ridge and furrow shape.

10. The underground facility according to the claim 1 further comprising a heat area connected to the ventilation means wherein the being dry air in the buffer space is heated up to the temperature of the room of the underground facility.

11. The underground facility according to the claim 10 further comprising a thermal collector from the sun or an outer atmosphere and a heat transfer means transferring the heat to the heat area.

12. A method for dehumidification in the underground facility comprising steps of:

30 dividing the inside space of the underground facility into two

part by constructing a inside wall near the wall so that one space formed between the inside wall and the wall is buffering space and the other space is a room space of the underground facility;

flowing the air of the room space into the buffer space having the lower temperature than the room space so that the moisture in the
5 inflow air is eliminated by condensation;

exhausting the being dry air in the buffer space back into the room space of the underground facility.

13. The method for dehumidification according to the claim 12,
10 further comprising steps of heating the being dry air before the step of exhausting the being dry air in the buffer space.

15

ABSTRACT

The present invention relates to a system and a method for eliminating the dampness or moisture included in the incoming atmosphere(or air) with high temperature and humidity from outside into the underground storage facilities by condensing the moisture to water-drops. The present invention suggests an underground facility having a dehumidification system comprising an inside wall depart from a wall of the underground facility to inside area with a distance, a buffering space formed between the wall and the inside wall, so that the inside wall divide the buffering space and a room of the underground facility and, a ventilation means by which air can be circulated between the room and the buffering space. According to the present invention, it is not need to install any air conditioner or dehumidifier needing a expensive cost for equipment at first and consuming much electrical power and maintenance cost in usage.

15

Fig. 1
conventional art

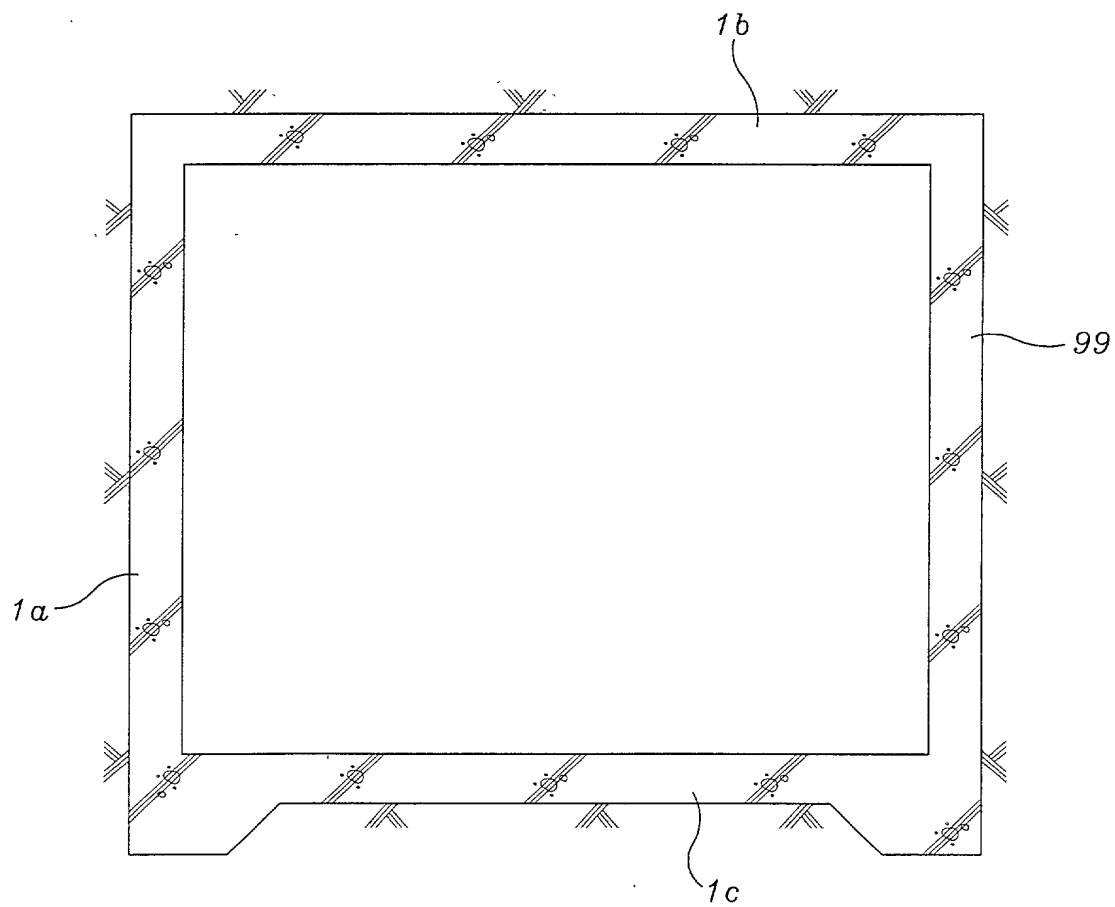


Fig. 2
conventional art

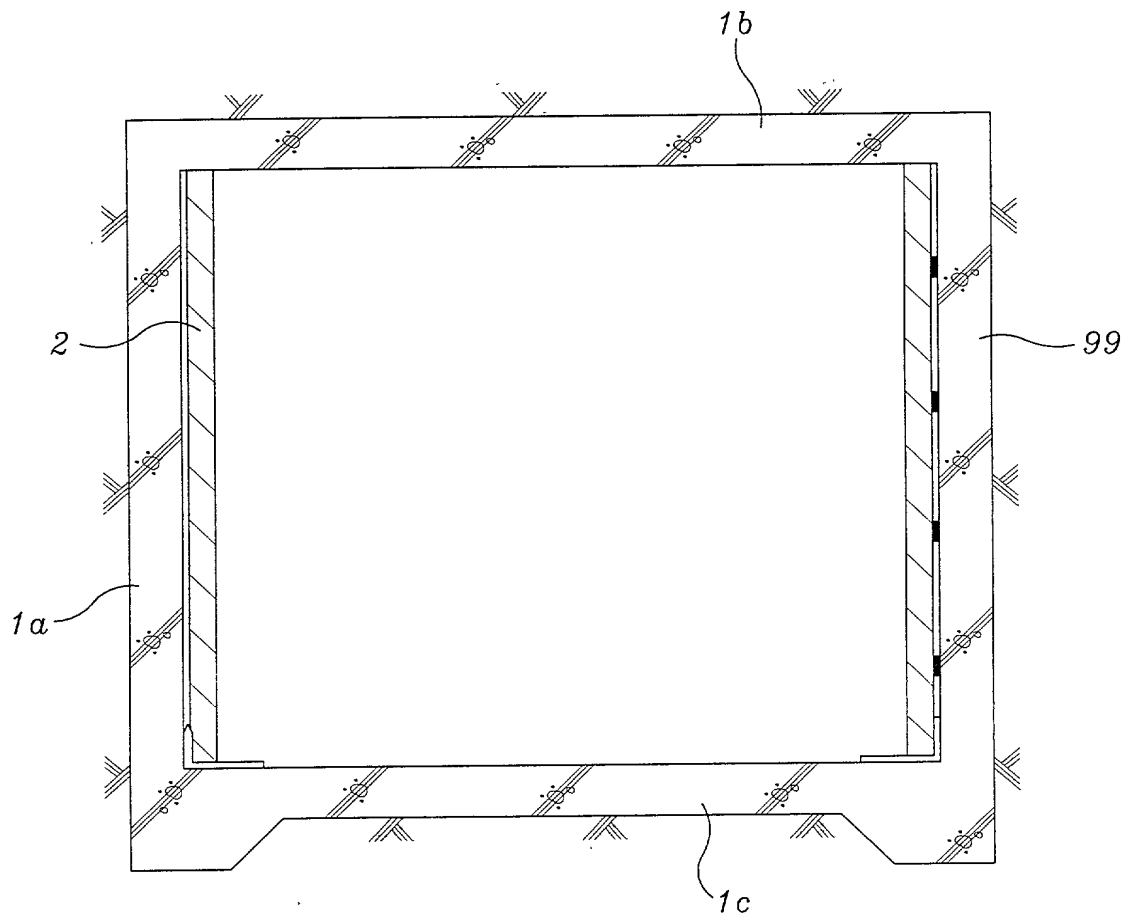


Fig. 3
conventional art

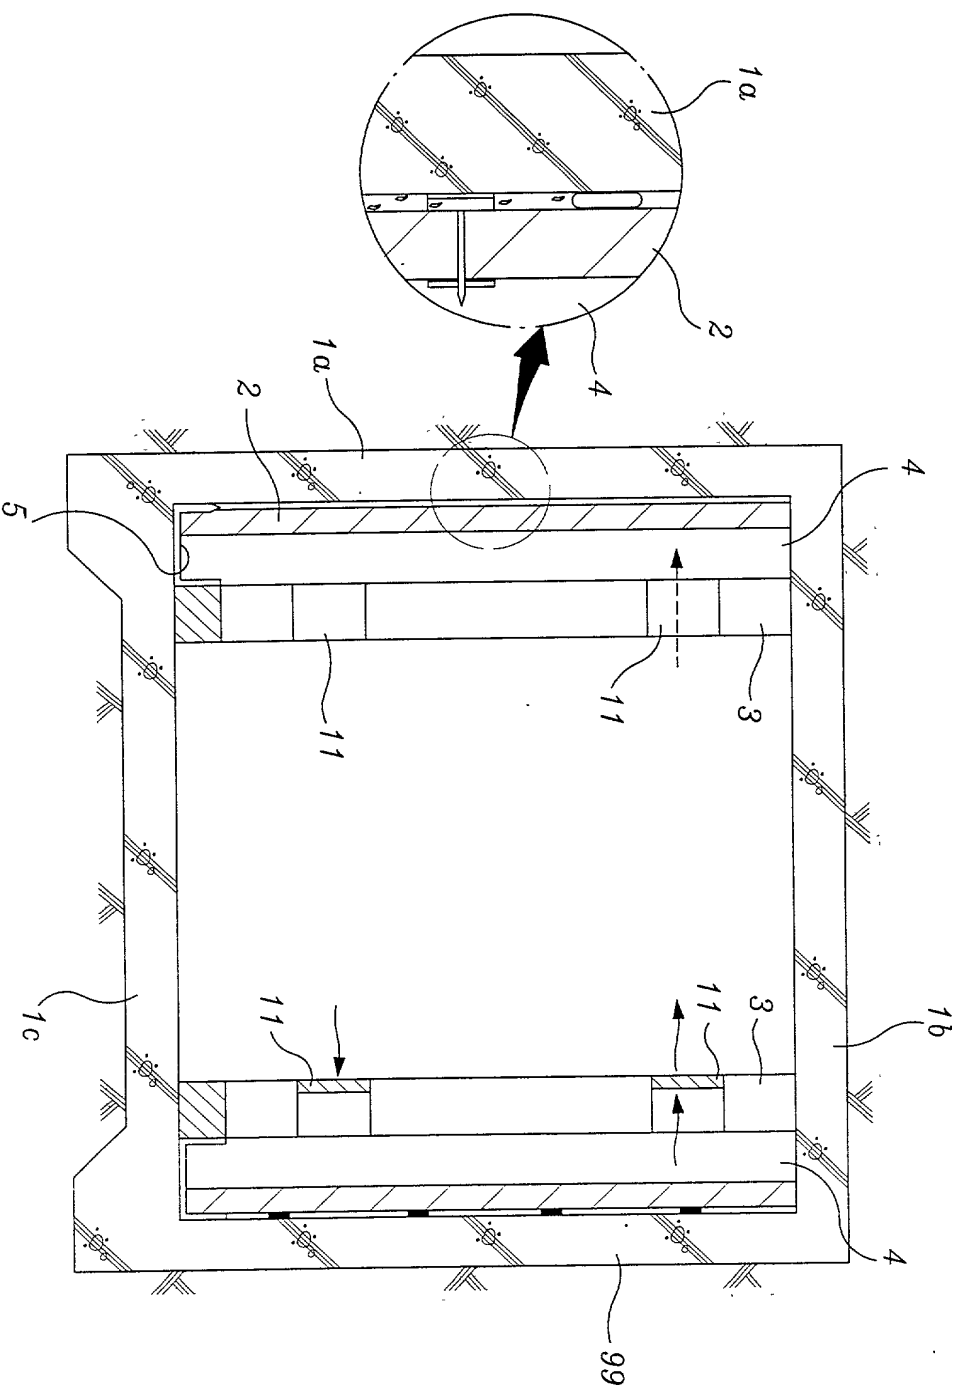


Fig. 4a

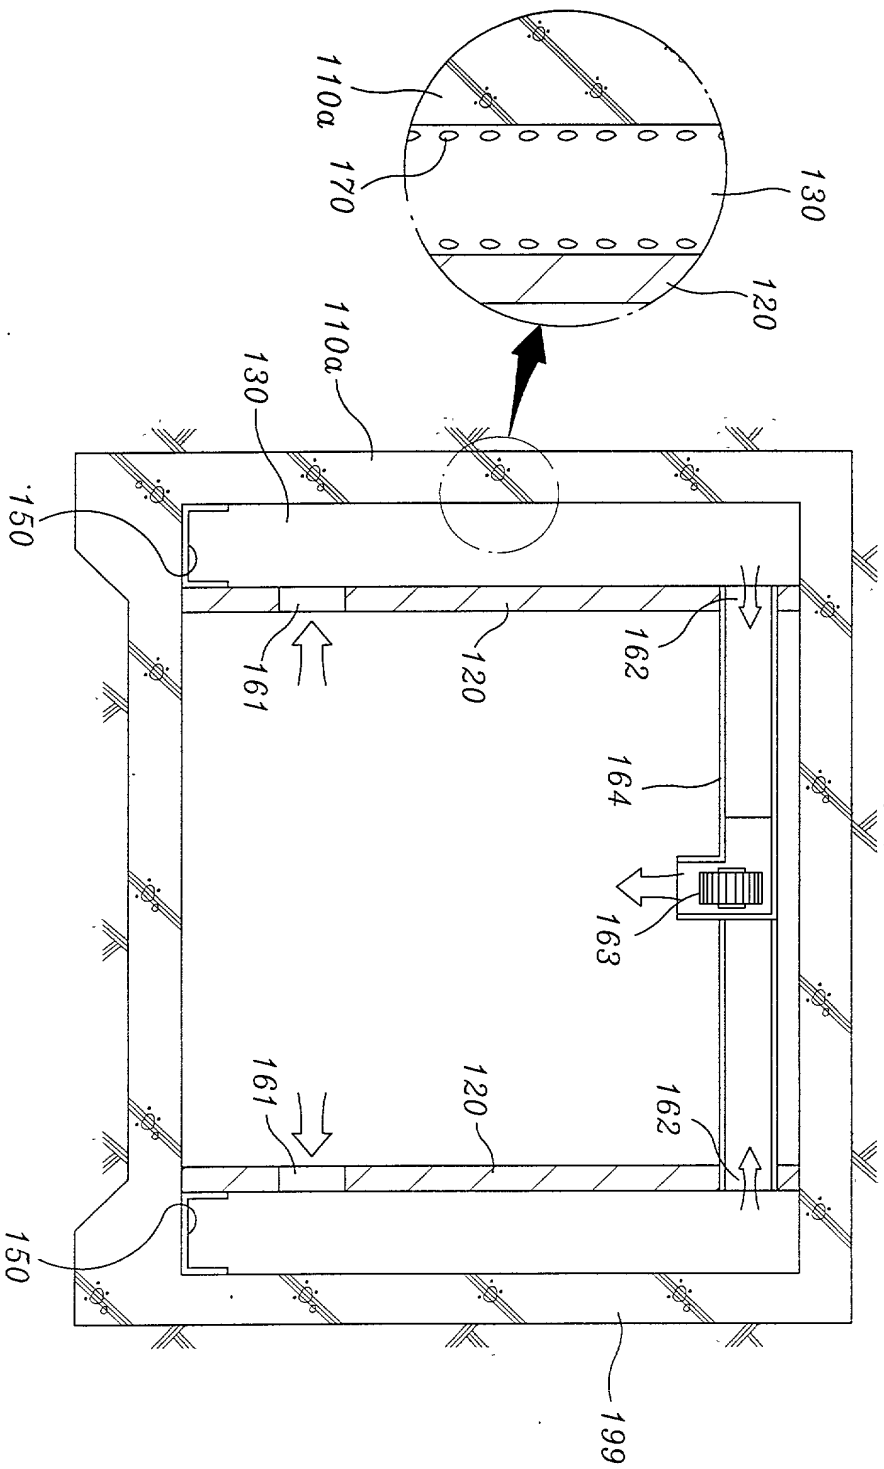


Fig. 4b

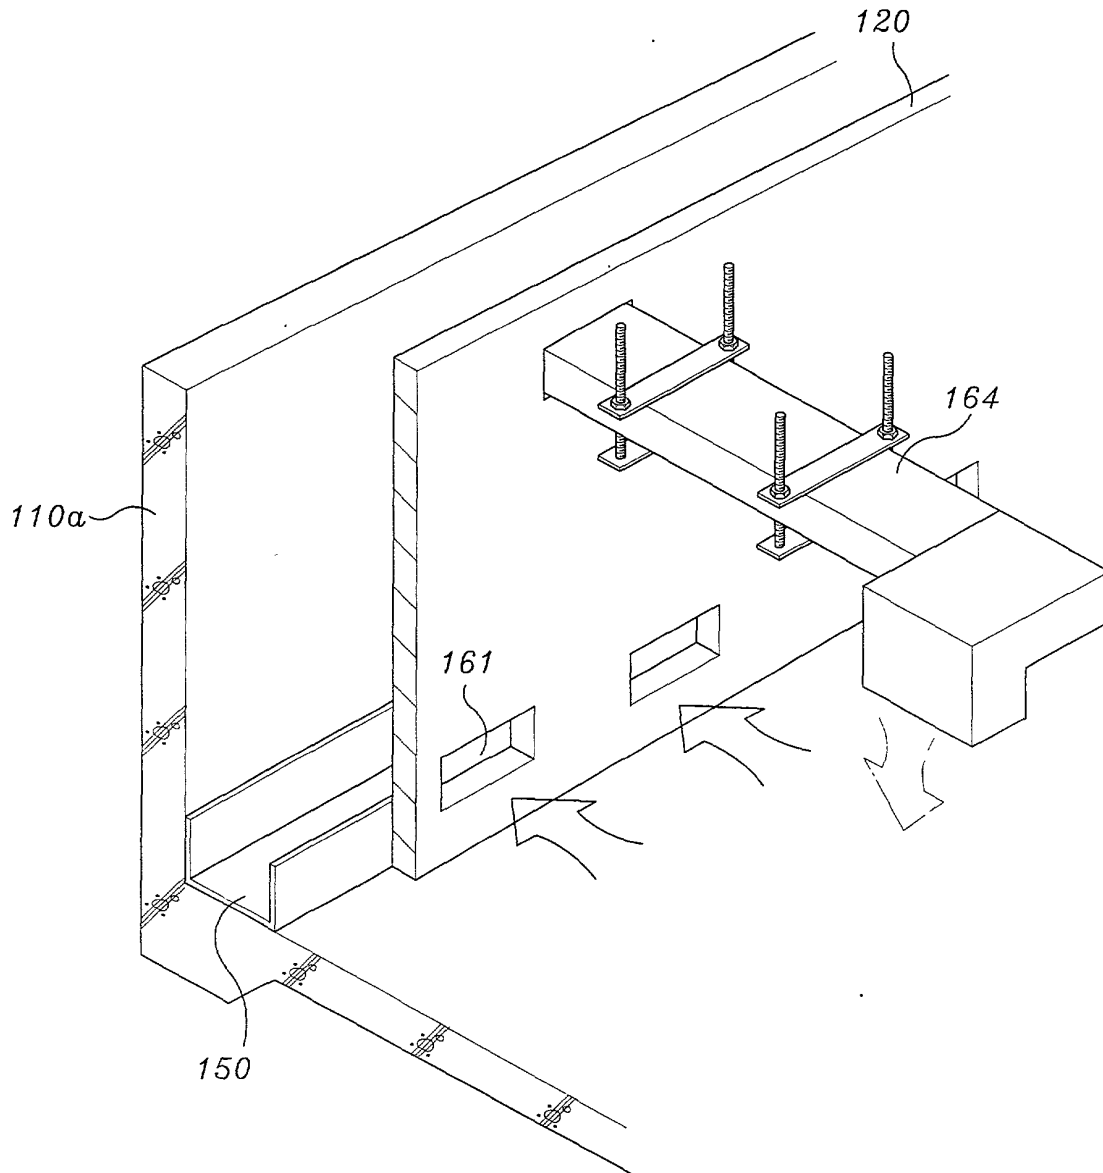


Fig. 5a

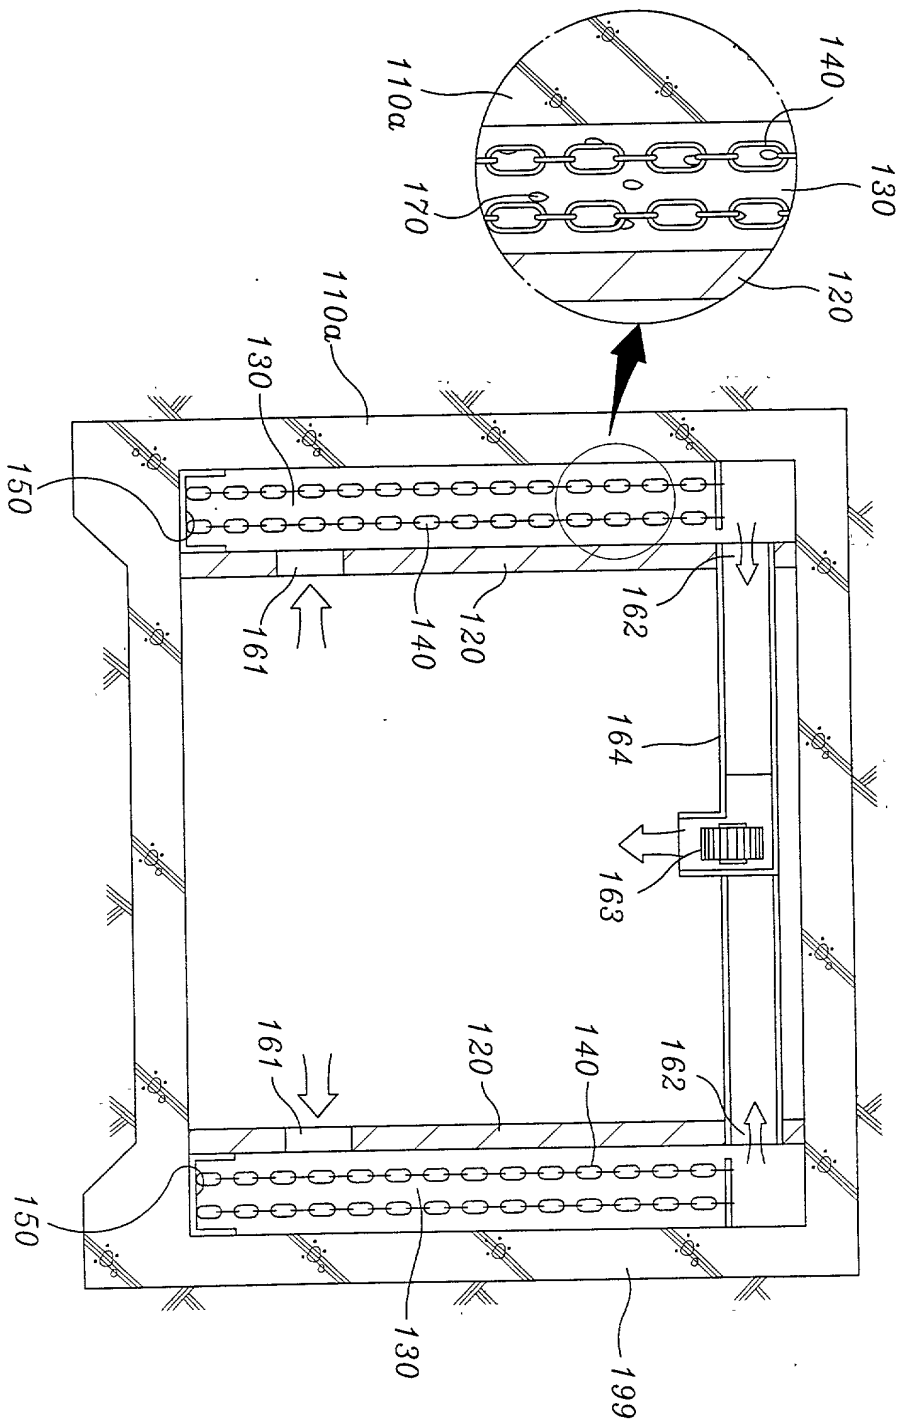


Fig. 5b

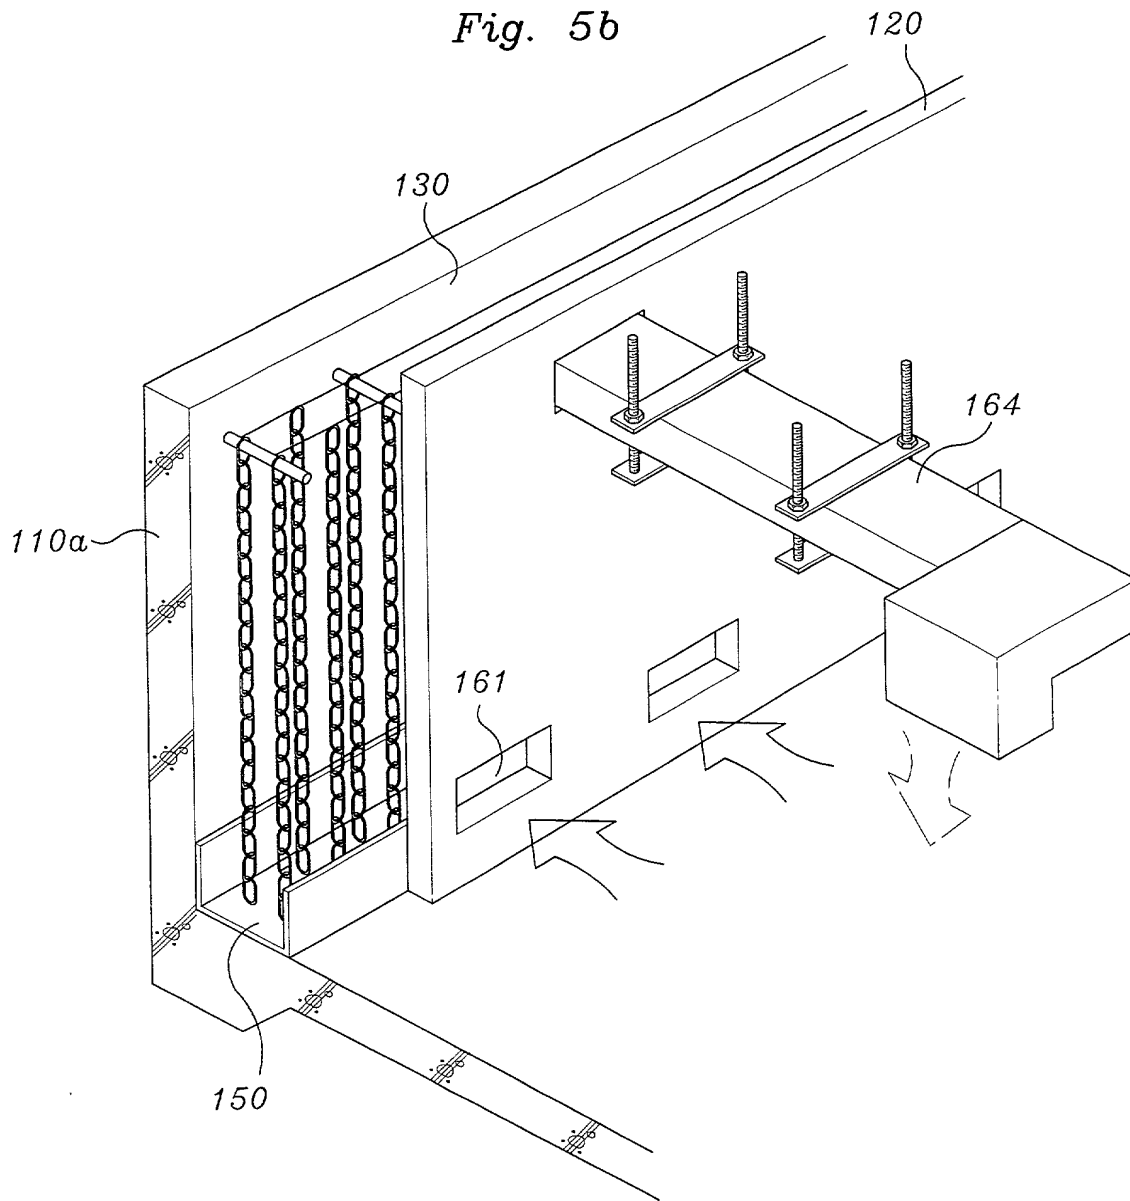


Fig. 6

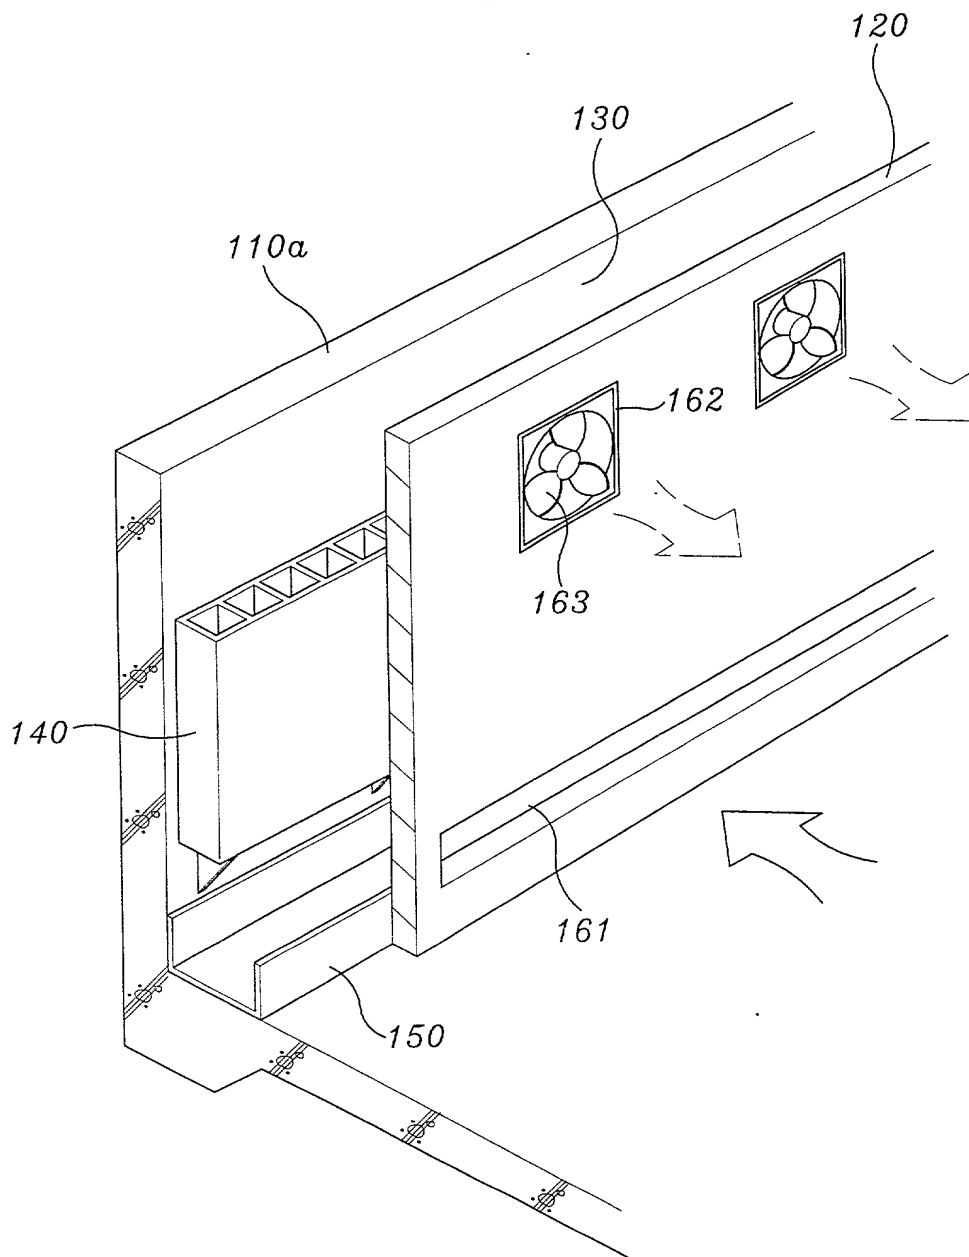


Fig. 7a

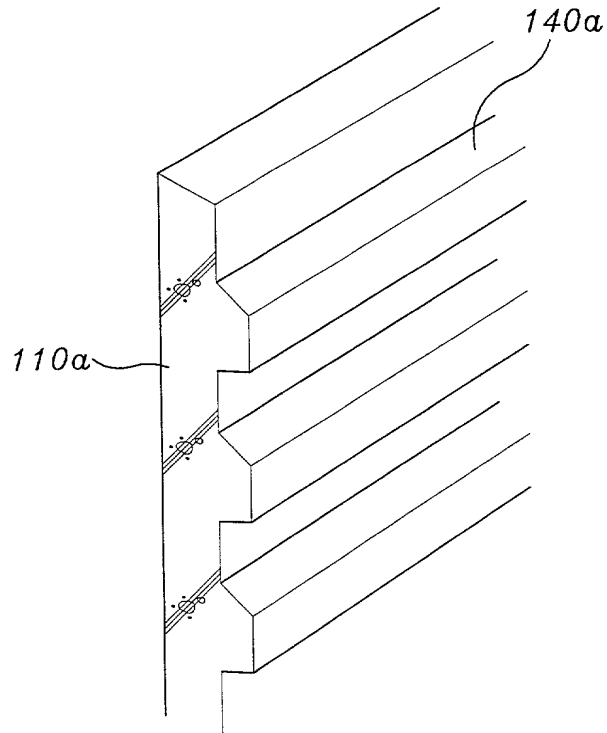
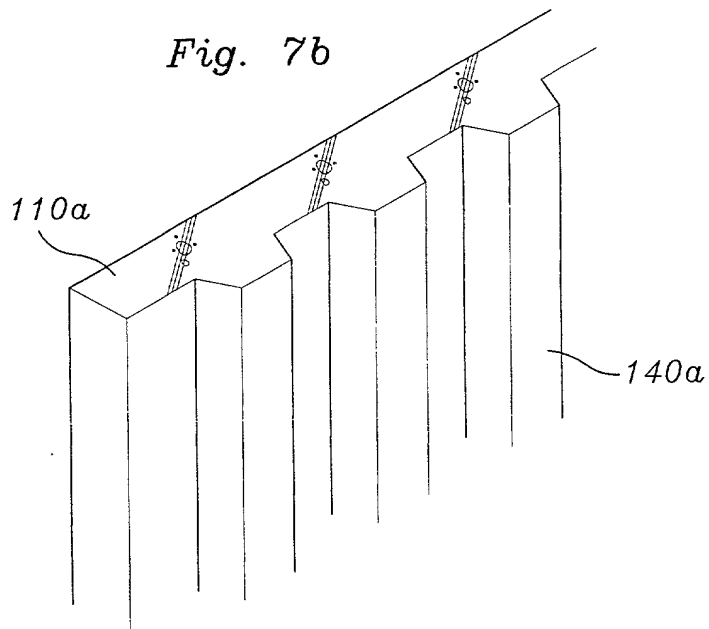


Fig. 7b



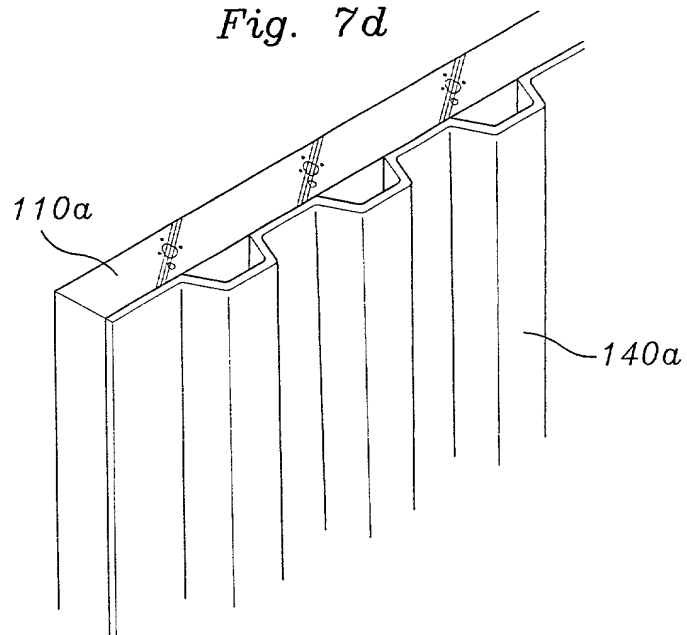


Fig. 8a

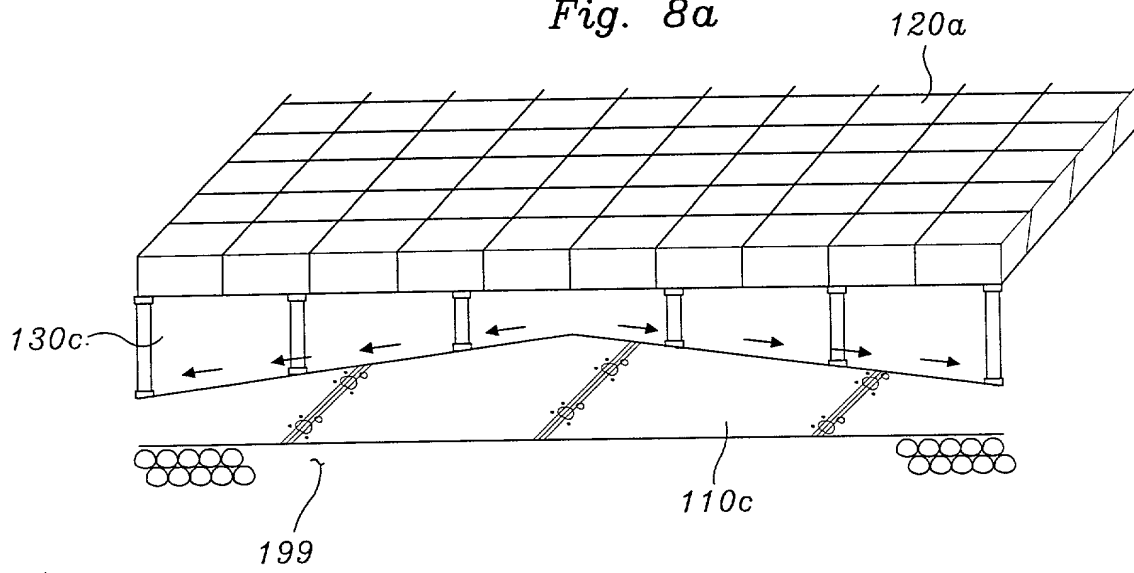


Fig. 8b

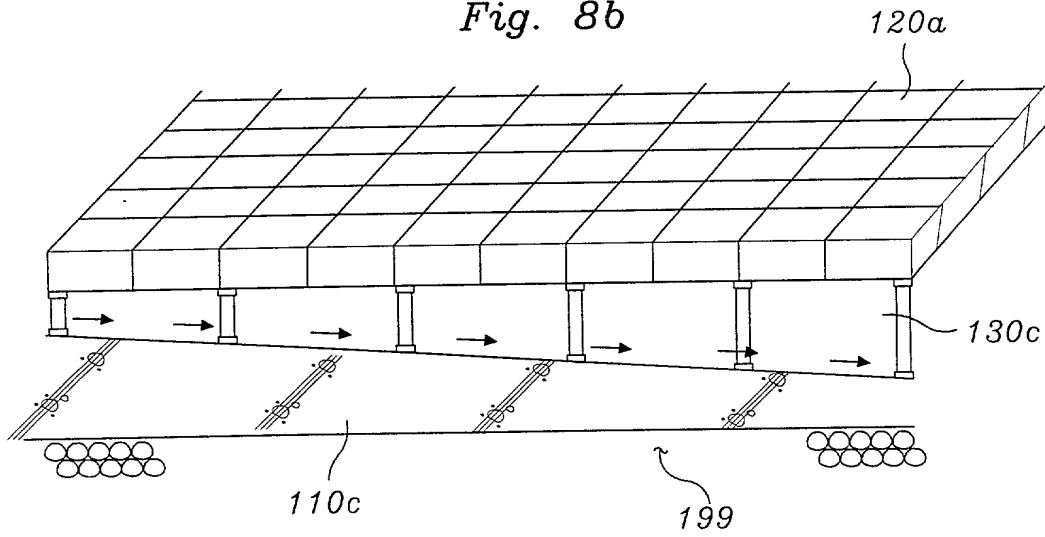


Fig. 8c

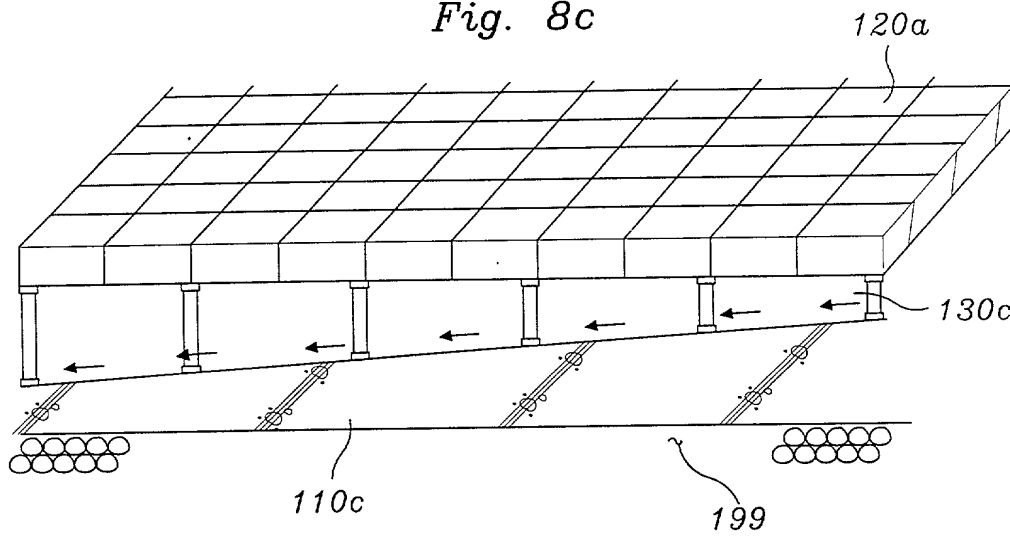


Fig. 9a

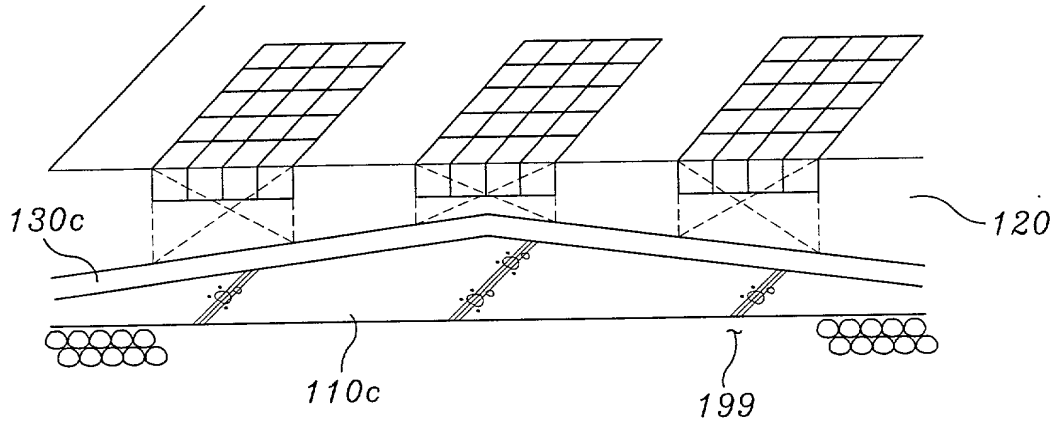


Fig. 9b

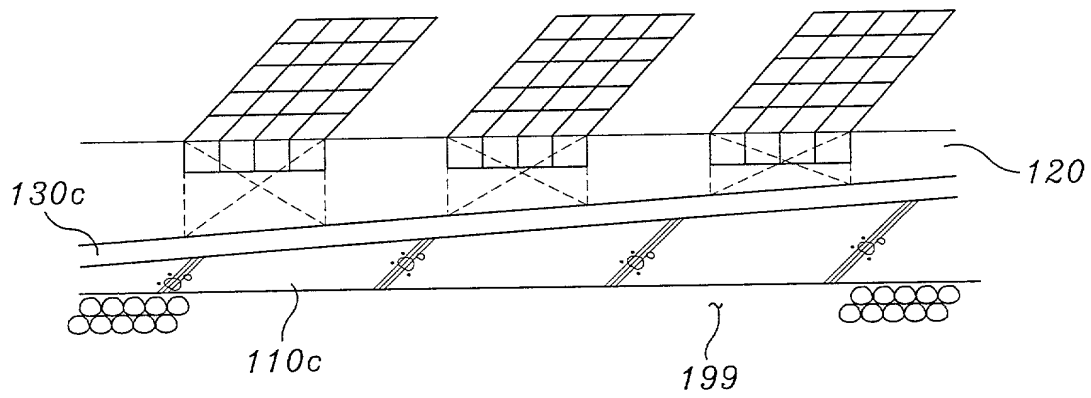


Fig. 9c

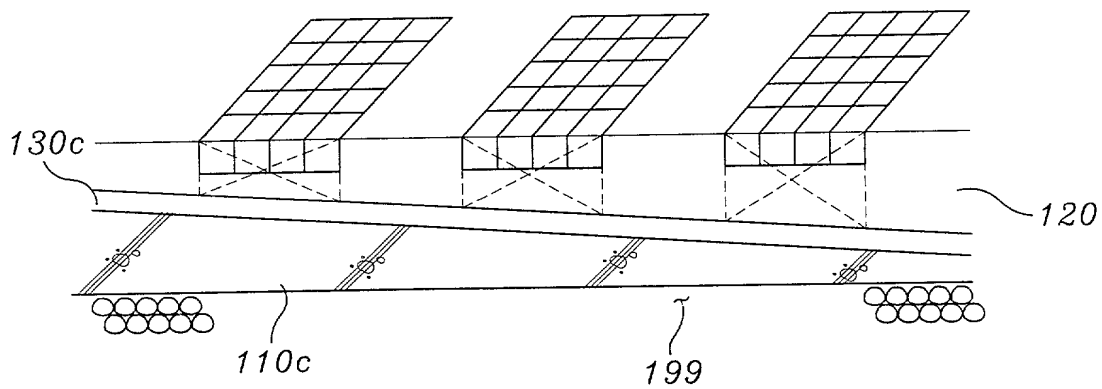


Fig. 10

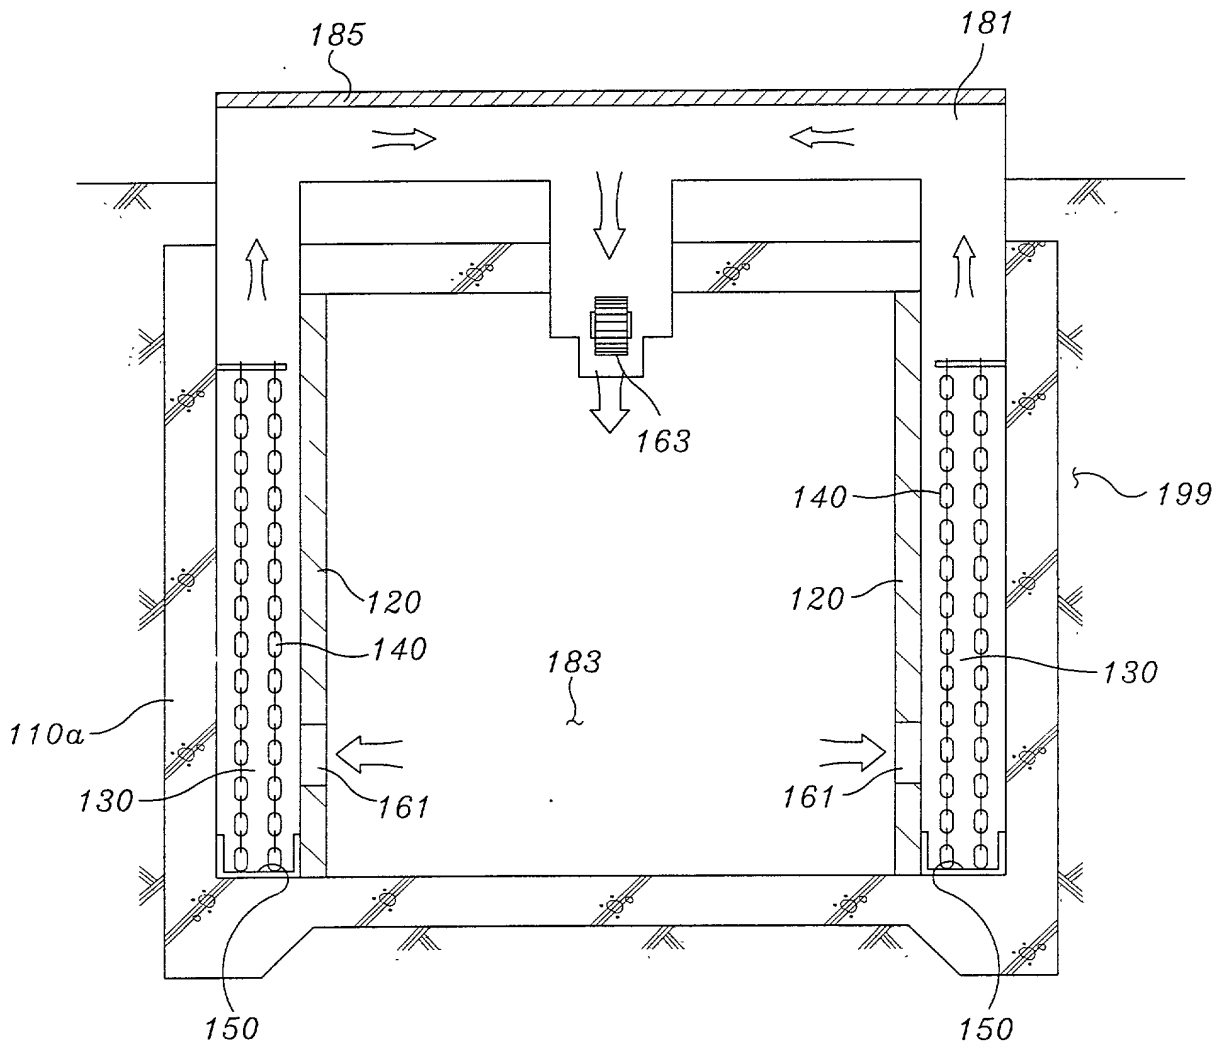


Fig. 11

